



Singlemode adapter SC/APC-SC/APC

P/N: KE-SCA-SM

OS2
singlemode

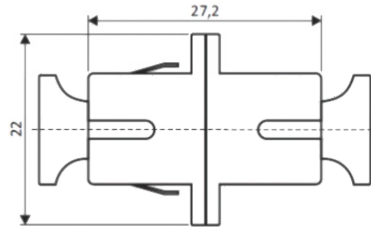

mechanical properties

| | |
|-----------------------|--------------------|
| Housing material | plastic |
| Alignment sleeve | ceramic (zirconia) |
| Insertion loss | < 0,2 dB |
| Durability | 500 |
| Operating temperature | -40°C to +80°C |

related products

| | |
|---------------------------|--|
| P/N: RAB-FO-X37-SL | Sliding patch panel for 24 x SC-SC, LC-LC Duplex or E2000-E2000 adapters |
| P/N: PIG09-SCA-020 | Pigtail SC |
| P/N: RAB-FO-X04 | Splice cassette for 16 splices |
| P/N: F11002 | Splice protection |