


# Singlemode adapter ST-ST

P/N: KE-ST-SM

**OS2**  
singlemode

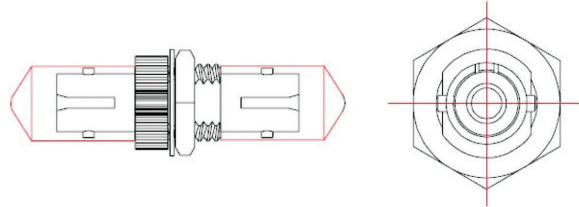

## mechanical properties

Housing material	zinc alloy
Alignment sleeve	ceramic (zirconia)
Insertion loss	< 0,2 dB
Durability	500
Operating temperature	-40°C to +80°C

## related products

P/N: <b>RAB-FO-X05-SL</b>	Sliding patch panel for 24 x ST-ST or FC-FC adapters
P/N: <b>PIG09-ST-020</b>	Pigtail ST
P/N: <b>RAB-FO-X04</b>	Splice cassette for 16 splices
P/N: <b>F11002</b>	Splice protection